


## ● Characteristics

1500 - PYROMETER - THERMOMETER - MODULAR - ECONOMIC

	- Input:	Infrared radiation
	- Maximum range	-40...+1000 °C
	- Output:	4...20 mA HART
	- Voltage supply:	24 VDC ±10%
	- Accuracy:	see technical details
	- Process connection:	several options
	- Electrical connection:	M12 male, 8-pole
	- Temperature range:	-20...+80 °C (ambient)
	- Limit value contacts:	2 electronically (NPN / PNP)
	- Adjustment:	keys / software
- Material:	stainless steel 1.5471 (medium contact)	

## ● Technical data

### Input

Infrared radiation: -40...1000 °C

### Output

Current signal: 4...20 mA with superimposed communication signal (HART)

Current range: 3,6...21 mA

Signal on error: 21 mA (sensor break, sensor open circuit, Sensor short circuit, underflow)

### Performance

Infrared sensor:	Range:	-40...1000 °C (minimum range: 100 °C)
	Spectral region:	8...14 µm
	Optical resolution:	15:1
	Accuracy*:	±1,5 °C, ±1,5%
	Repeatability*:	±0,75 °C, 0,75%
	Temperature coefficient:	±0,05 K/K, ±0,05% (ambient temperature: <18 °C, >28 °C)
	Resolution:	0,1 °C
	Response time:	30 ms (t90)
	Warm-up time:	10 min
	Emissivity, amplification:	0,100...1,100
Transmittance:	0,100...1,000	
* Temperature: ambient = 23±5 °C, test object = >0 °C / whichever is greater / ε = 1 / response time = 1 s		
Measuring amplifier:	Accuracy:	0,3% of range
	Resolution:	16 Bit
	Filter setting:	0...99 s
	Transmission behaviour:	temperature linear
	Measuring rate:	10 measurements / s
	Adjustment:	keys on display / via software (HART communication)
Indicator / limit values:	Turn-on delay time:	<5 s
	Resolution:	-9999...9999 digit
	Error of measurement:	±0,2% of range, ±1 digit
	Temperature drift:	100 ppm/K

## ● Applications

The METS-IR is designed for process monitoring with a non-contact measurement of temperature. With its two configurable limit value contacts, the integrated display and the numerous electrical connections, the temperature sensor is also suitable for applications with higher requirements.



## ● Technical data (continued)

### Indication

Display:	7 segment, 8,5 mm, red, 4 digits, representation mirror-inverted 180° possible
Head of display:	rotatable approx. 330°
Memory:	minimum / maximum values
Indication:	- measuring value                      - unit of measurement   - control menu
Decimal point:	automatically or manually, dependent on measuring range / unit

### Limit contacts

Electronically:	2x PNP or NPN (30 VDC, 200 mA) Option: 2x PNP or NPN (30 VDC, 1000 mA)
Indication:	1 LED red for each limit value
Voltage across:	<1 V
Settings:	with 3 keys (TouchM-Technology)
Setting range:	switch point and hysteresis: any value within measuring range
Switching delay:	0,0...999,9 s
Failsafe function:	adjustable
Galvanical insulation:	switching outputs are separated from measuring amplifier

### Supply

Voltage:	24 VDC ±10%
Reverse battery protection:	available (no function, no damage)

### Ambient conditions

Temperature:	Operating range: -20...+80 °C Sensing head: -20...120 °C Storing: -40...+85 °C
Air humidity:	10...95% rH (no condensation)


### Mechanics

Dimensions:	see page 3
Process connection:	1/2" / 3/4" / 1" / 1/2NPT
Electrical connection:	M12 male, 8-pole
Material:	Process connection: stainless steel 1.4571 Sensing head: stainless steel Body: PBT GF30 Head of display: polycarbonate (makrolon)
Weight:	approx.240 g
Fitting position:	any (avoid deposition on optics)
System pressure:	0 bar (barometric pressure)
Protection of device:	Ingress protection: at least IP 65 (electronics) PCB: potted
Vibration:	IEC 68-2-6: 3G, 11 – 200 Hz, any axis
Shock:	IEC 68-2-27: 50G, 11 ms, any axis

### Programmable features


Measuring amplifier:	Measuring range start (LRV) / Measuring range end (URV) / Adjustment, simulation of output current / Filter function / Linear output signal / HART address / 2-point calibration
Display:	range of indication / time of indication / decimal point / units / stabilisation of zero point / locking of programming / calibration points / TAG number
Limit value contacts:	limit value 1 and 2 / hysteresis 1 and 2 / delay times 1 and 2
Features, Operation:	according VDMA 24574-1 up to 24574-4

## ● Optical charts

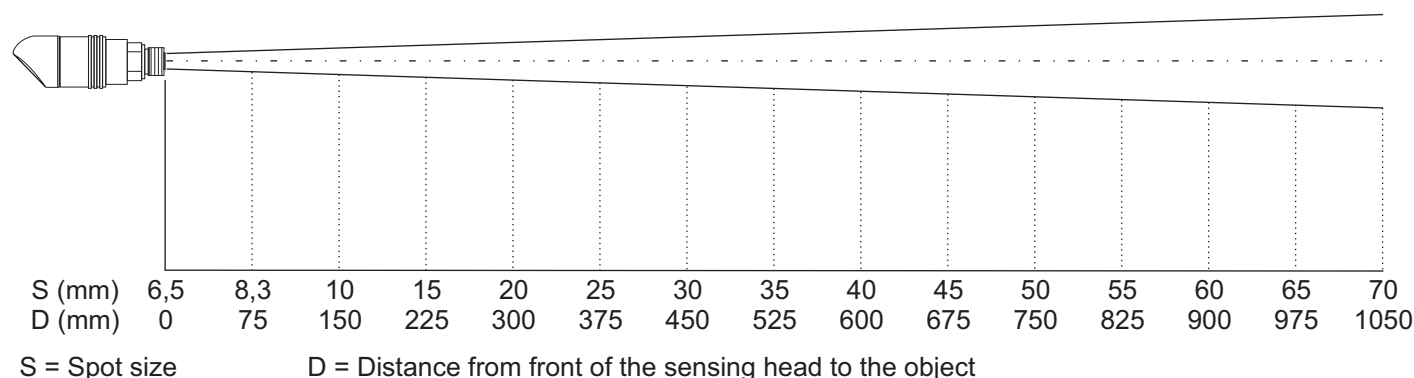


For valid measurement the spot size should be as large as the object or smaller.


● **Electrical connection**

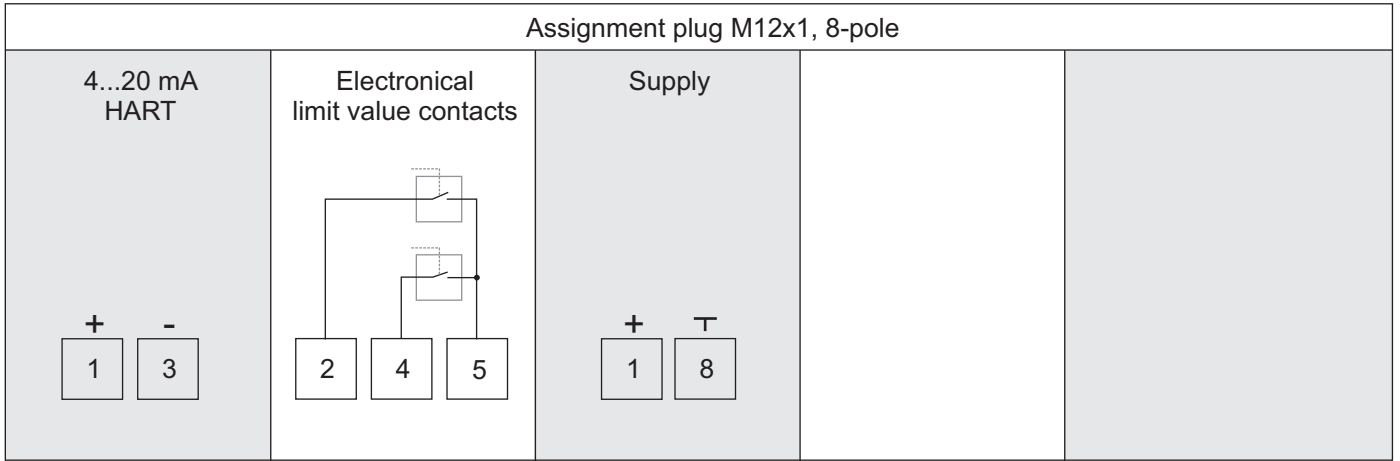

**Example of electrical connection**

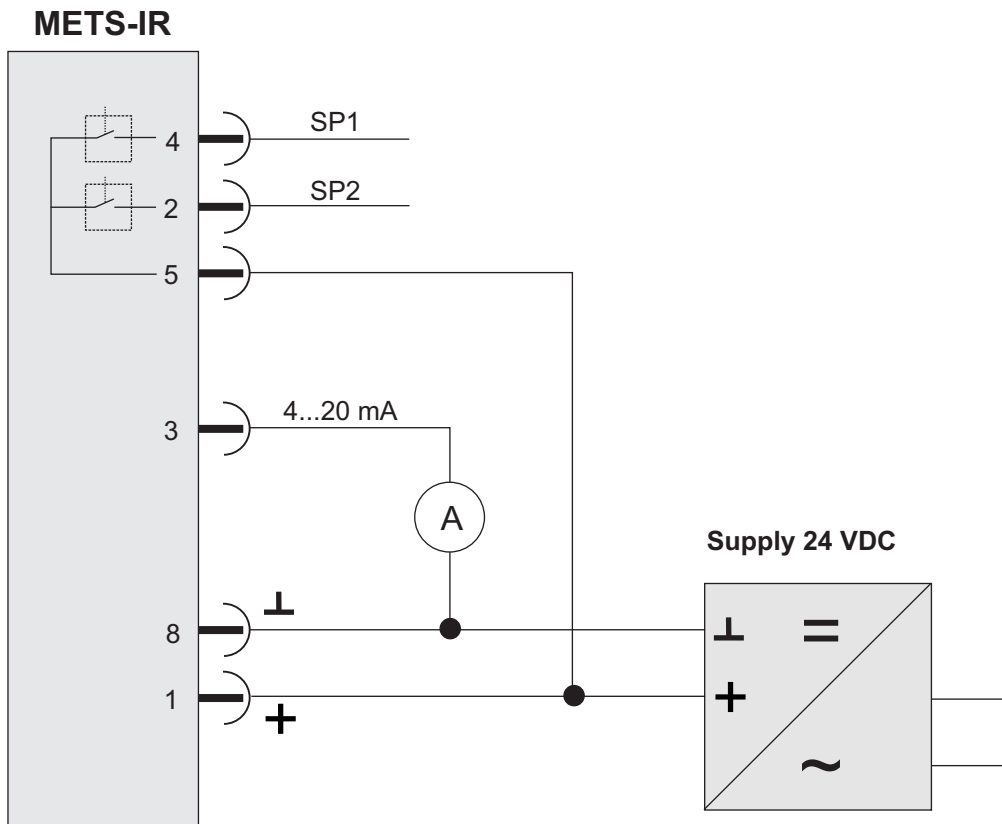

● **Dimensions (in mm)**

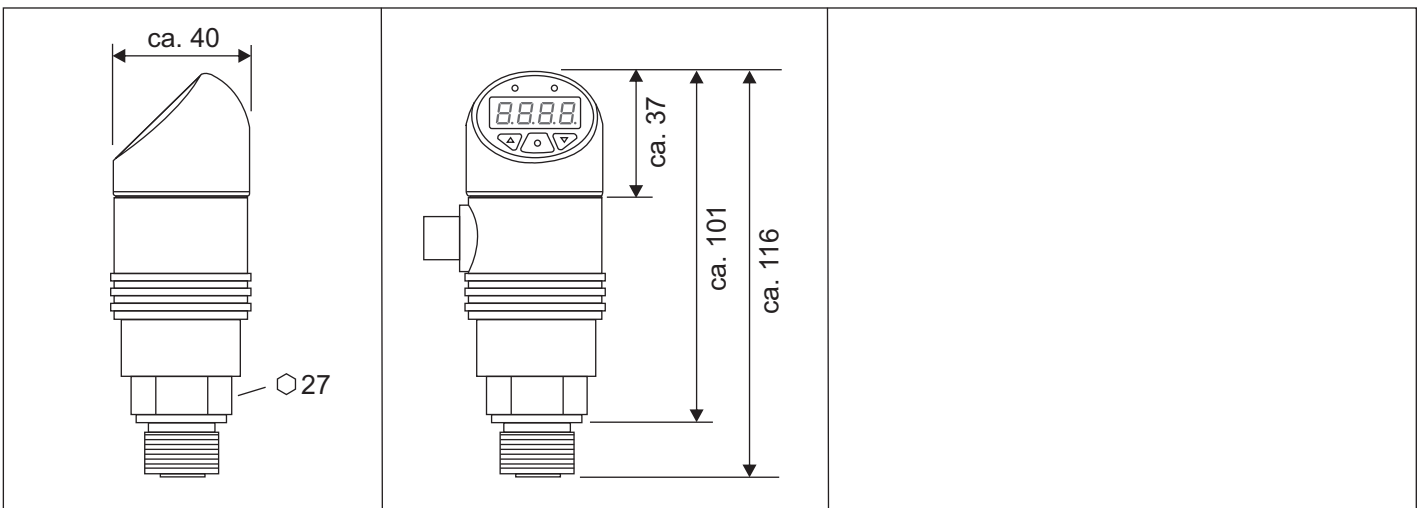

● **Order code**

O	C	X	X	X	X	X	X	-	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---

<b>Input:</b>	Infrared radiation	0									
<b>Sensor type:</b>	MIELT15	0									
<b>Process connection:</b>	1/2"		3								
	3/4"		4								
	1"		5								
	1/2" NPT		9								
<b>Limit value contacts:</b>	2x PNP, 30 VDC, 200 mA (standard)		0								
	1x PNP, 30 VDC, 200 mA		1								
	Without		2								
	2x NPN, 30 VDC, 200 mA		3								
	1x NPN, 30 VDC, 200 mA		4								
	2x PNP, 30 VDC, 1000 mA		5								
	1x PNP, 30 VDC, 1000 mA		6								
	2x NPN, 30 VDC, 1000 mA		7								
	1x NPN, 30 VDC, 1000 mA		8								
<b>Electrical connection:</b>	M12, 8-pole		2								
<b>Configuration:</b>	Factory setting <sup>1)</sup>		1								
	Customized (to specify) <sup>2)</sup>		2								
<b>Special model:</b>	No									0	
	Yes (to specify)									1	

1) Measuring range:            /    Indicating range

2) All settings, which are possible according the technical data, can be selected. For not given values the details of factory-set are used.

**Accessories:**

Interface HART, USB, software

Order No.:

● **HART Communication**

The HART-Tool is a graphical user interface for the ME series with menu-driven program for configuration. It can be used for putting into operation, configuration, analysis of signals, data backup and documentation of the device. Operating systems: Windows 2000, XP, Windows 7 und 8.1

Connection via HART interface (modem) with USB interface of a PC or hand-held HART communicator

- Settings:
- Adjustment of output current
  - Limits of measuring range
  - HART TAG number
  - Simulation of output current
  - Linear output signal
  - 2-point calibration
  - Filter function
  - HART address

**Please note:** When using communication via a HART modem, a communication resistance of 250 Ω has to be taken into account.